

**DESCRIPTION:****5.2KVDC Isolated DC/DC Converters for IGBT drivers**

The TPJXXX-3W is 5.2KVDC isolated DC/DC-converters for IGBT drivers in a SIP package. Their ultra low isolation capacitance can improve the capability of anti-interference.

The built-in common-ground mode of the unique asymmetric voltage output mode reduces the driver loss of IGBT driver. They feature short-circuit protection and auto-recovery , and can be widely used in:

General inverter, AC servo drive system, Electric welding machine, Uninterruptible power supply (UPS) . They offer the ideal solution in many space critical applications for board level power distribution.

The series offers smaller size, improved efficiency, lower output ripple noise.

**FEATURES**

RoHS compliant	Max capacitive load:1000uF	DC/DC-converters for IGBT drivers
Operating temperature: -40°C to 105°C	Footprint 1.91cm <sup>2</sup>	UL 94V-0 package material
No heatsink required	5.2KVDC isolation	SIP package style
Input voltage: 24V,15V,12V	Dual Output voltage: +15/-8, +15/-3	short-circuit protection

**SELECTION GUIDE**

Part Number	Nominal Input Voltage	Output Voltage	Output Current	Efficiency (Min.)
	V	V	mA	%
TPJ1215/3-3W	12	+15/-3	+140/-227.5	73-80
TPJ1215/8-3W	12	+15/-8	+120/-120	73-80
TPJ1515/8-3W	15	+15/-8	+120/-120	76-80
TPJ1515/9-3W	15	+15/-9	+100/-100	76-80
TPJ2415/8-3W	24	+15/-8	+120/-120	76-80

**INPUT CHARACTERISTICS**

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	24V input	22.8	24	25.2	VDC
Voltage range	15V inout	13.5	15	16.5	VDC
Voltage range	12V input	10.8	12	13.2	VDC

**INPUT SPECIFICATIONS**

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Filter				Filter capacitor	
Hot plug				Unavailable	
Input current	DC24V	30		144	mA
Input current	DC15V	40		280	mA
Input current	DC12V	35		230	mA

**OUTPUT CHARACTERISTICS**

Parameter	Conditions	Min.	Typ.	Max.	Units
+Vo	Vin=12/15/24VDC, Pin6 & Pin7 +lo=+120mA	14.1	14.81	15.6	VDC
-Vo	Vin=12/15/24VDC, Pin5 & Pin6 -lo=-120mA	-6.24	-7.84	-9.44	VDC
+Vo	Vin=12VDC, Pin6 & Pin7 +lo=+140mA	14.25	15	15.75	VDC
-Vo	Vin=12VDC, Pin5 & Pin6 -lo=-227.5mA	-2.76	-3	-3.24	VDC
+Vo	Vin=15VDC, Pin6 & Pin7 +lo=+100mA	14.25	15.00	15.75	VDC
-Vo	Vin=15VDC, Pin5 & Pin6 -lo=-100mA	-7.92	-8.37	-8.82	VDC

Output Voltage Accuracy See tolerance envelope graph

Line Regulation	High Vin to Low Vin	-	±1.0	±1.5	-
Temperature Coefficient	Full load	-	-	±0.04	%/°C

**GENERAL CHARACTERISTICS**

Parameter	Conditions	Min.	Typ.	Max.	Units
Short Circuit Protection				Continuous, self-recovery	
Ripple & Noise*	20MHz bandwidth	-	100	200	mVp-p
Load regulation	10%-100% load			Positive output 8%-15%, Negative output 10-15%	

## ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Input-output, with the test time of 1 minute and the leak current lower than 1mA	5200		-	VDC
Resistance	Input-output, Isolation voltage 500VDC	1000	-	-	MΩ
Capacitance	Input-output, 100KHz/0.1V	-	5	-	pF


## GENERAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Storage Humidity	Non-condensing	-	-	95	%RH
Switching frequency	Full load, nominal input voltage	-	100	300	KHz
MTBF	MIL-HDFK-217F@25°C	3500	-	-	K hours
Cooling Method		Free convection			


## TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature	Derating when operating temperature up to 85°C, (see Fig. 2)	-40	-	105	°C
Storage Temperature		-55	-	125	°C
Pin Welding Resistance	Welding spot is 1.5mm away from the casing, 10 seconds	-	-	300	°C
Casing Temperature Rise	Ta=25°C, nominal input, full load output	-	-	40	°C


## TEMPERATURE DERATING GRAPHS

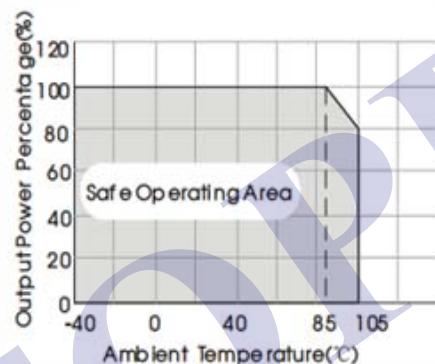


## TOLERANCE ENVELOPE

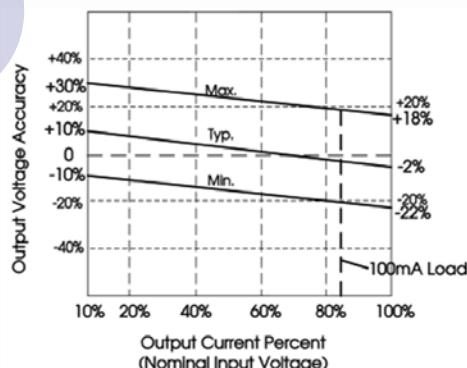


## Efficiency&amp;Output Current (Vin=12V)

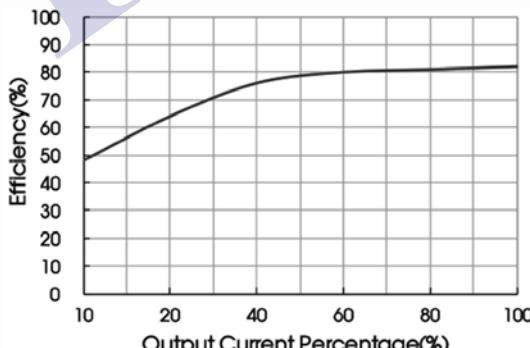

## Efficiency&amp;Input voltage (full load)

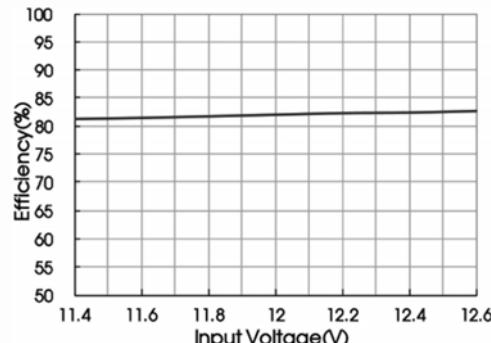

## MECHANICAL DIMENSIONS

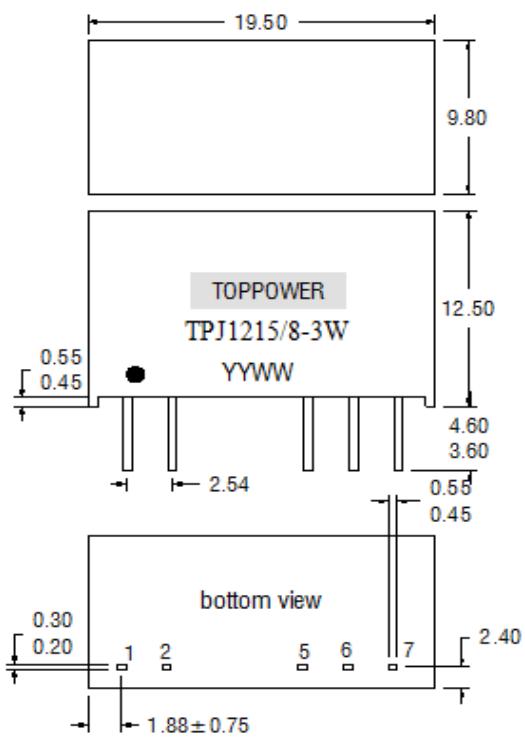


## PIN CONNECTIONS

Output	
Pin	Function
1	+Vin
2	GND
5	-Vout
6	OV
7	+Vout


Weight: 4.3g

All dimensions in mm  $\pm 0.25$ mm. All pins on a 2.54mm pitch and within  $\pm 0.25$ mm of true position.

## RECOMMENDED FOOTPRINT DETAILS

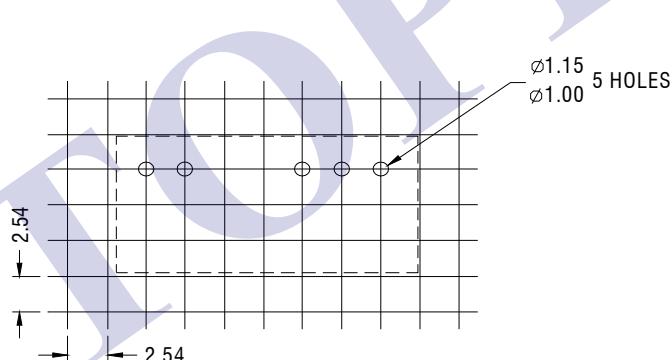
All dimensions in mm  $\pm 0.25$ mm

## TUBE OUTLINE DIMENSIONS

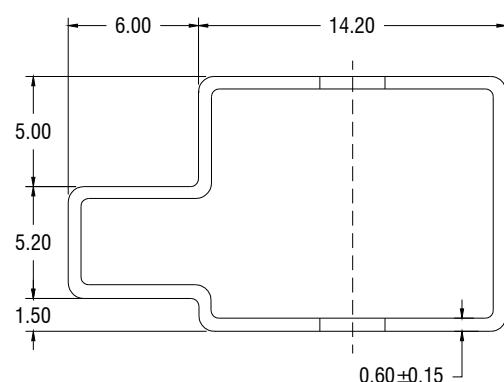Unless otherwise stated all dimensions in  $\pm 0.5$ mm.  
Tube length : 25mm  $\pm$  2mm.      Tube Quantity : 25

## RECOMMENDED FOOTPRINT DETAILS

### 1. Typical application

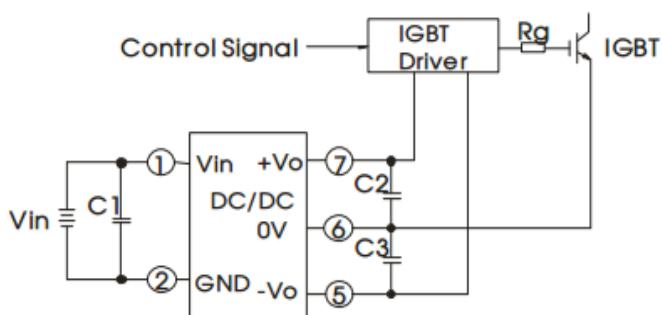


C1/C2/C3

100uF/35V (Low internal resistance capacitance)

Note: On both ends of capacitance C2 and C3 shunt respectively a capacitance value in 1uF -10uF ceramic capacitors

### EMC solution-recommended circuit


#### recommended circuit 1

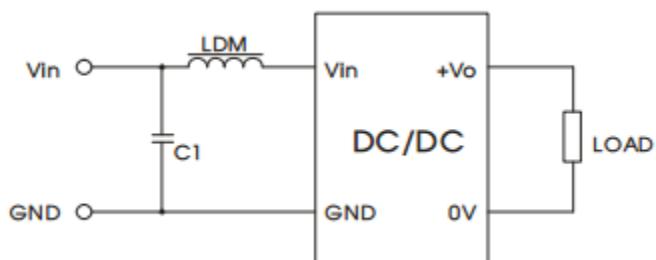

Input voltage (VDC)		12/15
EMI	C1	4.7μF /50V
	LDM	12μH

Note: It is not allowed to connect modules output in parallel to enlarge the power

#### recommended circuit 2

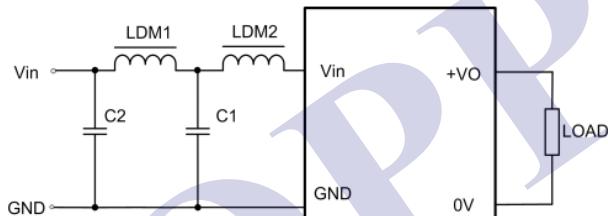

Input voltage (VDC)		12/15
EMI	C1,C2	4.7uF/50V
EMI	LDM1	12uH
EMI	LDM2	47uH